





### ALUMINUM CASTINGS

**826**      **DF**



HEIGHT 17 1/4 IN      43.8 CM  
 WIDTH 5 1/4 IN      13.3 CM  
 THICK 1 IN      2.5 CM  
 WEIGHT 2.6 LBS      1.2 KGS

**1836**      **DF**  
NEW



LAMB UNDER WILLOW

HEIGHT 35 3/4 IN      90.8 CM  
 WIDTH 11 IN      27.9 CM  
 THICK 1 IN      2.5 CM  
 WEIGHT 17.0 LBS      7.7 KGS

**1830**      **DF**  
NEW




30 DEG

LAMB UNDER WILLOW

HEIGHT 31 3/4 IN      80.6 CM  
 WIDTH 10 1/2 IN      26.7 CM  
 THICK 1 1/2 IN      3.8 CM  
 WEIGHT 15.0 LBS      6.8 KGS

**1822**      **DF**  
NEW



22 DEG

LAMB UNDER WILLOW

HEIGHT 32 3/8 IN      82.2 CM  
 WIDTH 10 1/2 IN      26.7 CM  
 THICK 1 1/2 IN      3.8 CM  
 WEIGHT 16.0 LBS      7.3 KGS

**9264**      **DF**  
NEW




HEIGHT 12 1/4 IN      103.2 CM  
 WIDTH 12 1/4 IN      4.8 CM  
 THICK 4 IN      4.8 CM  
 WEIGHT 10.0 LBS      4.5 KGS

**9269**      **DF**  
NEW



THIS PIECE GOES WITH SPEAR POINTS NO. 9270 AND 9275 AS SHOWN ON PAGES 81 AND 84.

HEIGHT 30 IN      76.2 CM  
 WIDTH 9 1/2 IN      24.1 CM  
 THICK 1 IN      2.5 CM  
 WEIGHT 10.0 LBS      4.5 KGS

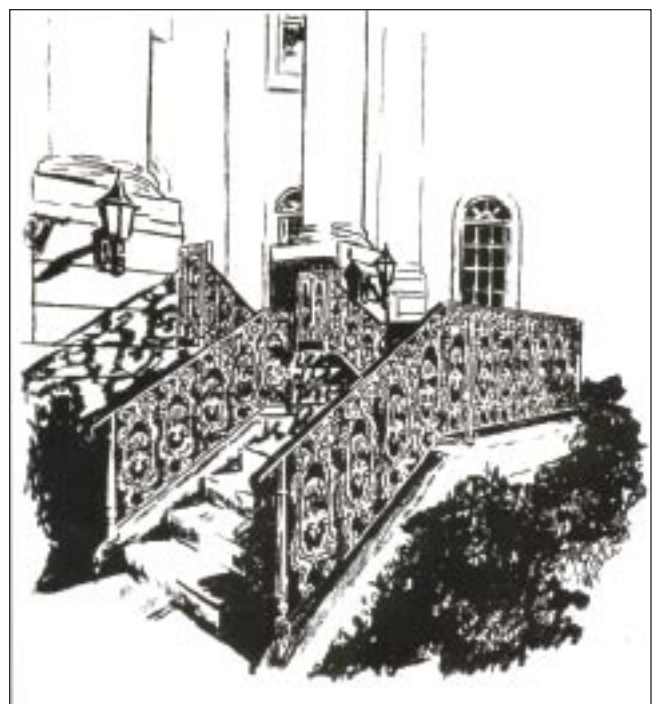

Church railings using lamb-under-willow heavy duty castings #1822, #1830, and #1836.